


SKM 300GB128D

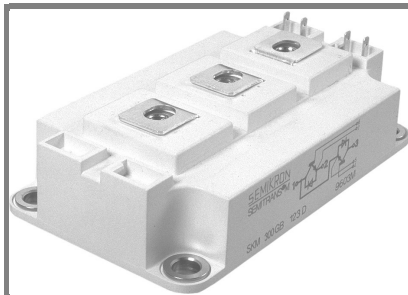

SEMITRANS™ 3

SPT IGBT Module

SKM 300GB128D


SKM 300GAL128D

Features

- Homogeneous Si
- SPT = Soft-Punch-Through technology
- V_{CEsat} with positive temperature coefficient
- High short circuit capability, self limiting to $6 \times I_C$







Typical Applications







- AC inverter drives
- UPS
- Electronic welders at f_{sw} up to 20 kHz

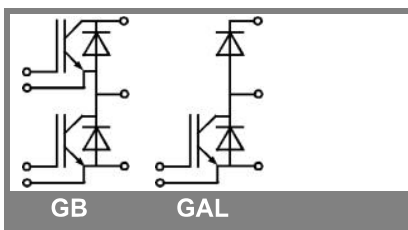





Absolute Maximum Ratings		$T_c = 25^\circ\text{C}$, unless otherwise specified	
Symbol	Conditions	Values	Units
IGBT			
V_{CES}		1200	V
I_C	$T_c = 25 (80)^\circ\text{C}$	370 (265)	A
I_{CRM}	$t_p = 1 \text{ ms}$	400	A
V_{GES}		± 20	V
T_{vj} (T_{stg})	$T_{OPERATION} \leq T_{stg}$	- 40 ... + 150 (125)	$^\circ\text{C}$
V_{isol}	AC, 1 min.	4000	V
Inverse diode			
I_F	$T_c = 25 (80)^\circ\text{C}$	260 (180)	A
I_{FRM}	$t_p = 1 \text{ ms}$	400	A
I_{FSM}	$t_p = 10 \text{ ms}$; sin.; $T_j = 150^\circ\text{C}$	1800	A
Freewheeling diode			
I_F	$T_c = 25 (80)^\circ\text{C}$	260 (180)	A
I_{FRM}	$t_p = 1 \text{ ms}$	400	A
I_{FSM}	$t_p = 10 \text{ ms}$; sin.; $T_j = 150^\circ\text{C}$	1800	A

Characteristics		$T_c = 25^\circ\text{C}$, unless otherwise specified			Units
Symbol	Conditions	min.	typ.	max.	Units
IGBT					
$V_{GE(th)}$	$V_{GE} = V_{CE}$, $I_C = 8 \text{ mA}$	4,5	5,5	6,5	V
I_{CES}	$V_{GE} = 0$, $V_{CE} = V_{CES}$, $T_j = 25 ()^\circ\text{C}$		0,2	0,6	mA
$V_{CE(TO)}$	$T_j = 25 ()^\circ\text{C}$		1 (0,9)	1,15 (1,05)	V
r_{CE}	$V_{GE} = 15 \text{ V}$, $T_j = 25 (125)^\circ\text{C}$		4,5 (6)	6 (7,5)	$\text{m}\Omega$
$V_{CE(sat)}$	$I_{Cnom} = 200 \text{ A}$, $V_{GE} = 15 \text{ V}$, chip level		1,9 (2,1)	2,35 (2,55)	V
C_{ies}	under following conditions		17		nF
C_{oes}	$V_{GE} = 0$, $V_{CE} = 25 \text{ V}$, $f = 1 \text{ MHz}$		2		nF
C_{res}			1,9		nF
L_{CE}				20	nH
$R_{CC+EE'}$	res., terminal-chip $T_c = 25 (125)^\circ\text{C}$		0,35 (0,5)		$\text{m}\Omega$
$t_{d(on)}$	$V_{CC} = 600 \text{ V}$, $I_{Cnom} = 200 \text{ A}$		170		ns
t_r	$R_{Gon} = R_{Goff} = 5 \Omega$, $T_j = 125^\circ\text{C}$		55		ns
$t_{d(off)}$	$V_{GE} = \pm 15 \text{ V}$		660		ns
t_f			60		ns
$E_{on} (E_{off})$			22 (22)		mJ
Inverse diode					
$V_F = V_{EC}$	$I_{Fnom} = 200 \text{ A}$; $V_{GE} = 0 \text{ V}$; $T_j = 25 (125)^\circ\text{C}$		2 (1,8)	2,5	V
$V_{(TO)}$	$T_j = 25 (125)^\circ\text{C}$		1,1	1,2	V
r_T	$T_j = 25 (125)^\circ\text{C}$		4,5	6,5	$\text{m}\Omega$
I_{RRM}	$I_{Fnom} = 200 \text{ A}$; $T_j = 125 ()^\circ\text{C}$		280		A
Q_{rr}	$di/dt = 6300 \text{ A}/\mu\text{s}$		33		μC
E_{rr}	$V_{GE} = 0 \text{ V}$		11		mJ
FWD					
$V_F = V_{EC}$	$I_F = 200 \text{ A}$; $V_{GE} = 0 \text{ V}$, $T_j = 25 (125)^\circ\text{C}$		2 (1,8)	2,5	V
$V_{(TO)}$	$T_j = 25 (125)^\circ\text{C}$		1,1	1,2	V
r_T	$T_j = 25 (125)^\circ\text{C}$		4,5	6,5	$\text{m}\Omega$
I_{RRM}	$I_F = 200 \text{ A}$; $T_j = 25 (125)^\circ\text{C}$		280		A
Q_{rr}	$di/dt = 0 \text{ A}/\mu\text{s}$		33		μC
E_{rr}	$V_{GE} = V$		11		mJ
Thermal characteristics					
$R_{th(j-c)}$	per IGBT			0,085	K/W
$R_{th(j-c)D}$	per Inverse Diode			0,18	K/W
$R_{th(j-c)FD}$	per FWD			0,18	K/W
$R_{th(c-s)}$	per module			0,038	K/W
Mechanical data					
M_s	to heatsink M6	3		5	Nm
M_t	to terminals M6	2,5		5	Nm
w				325	g

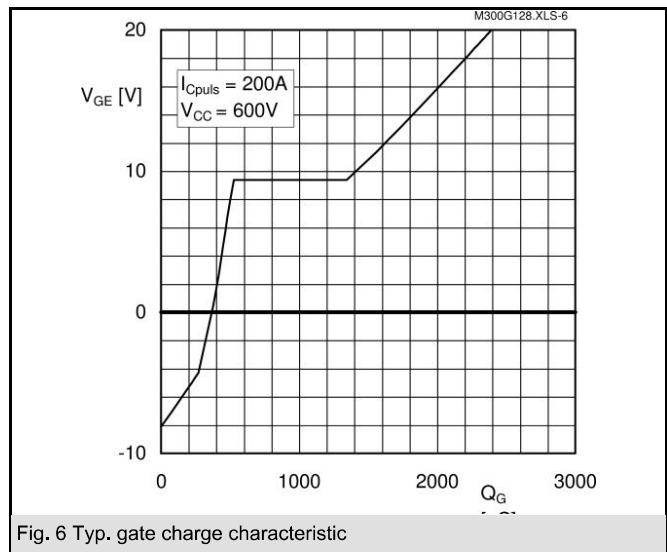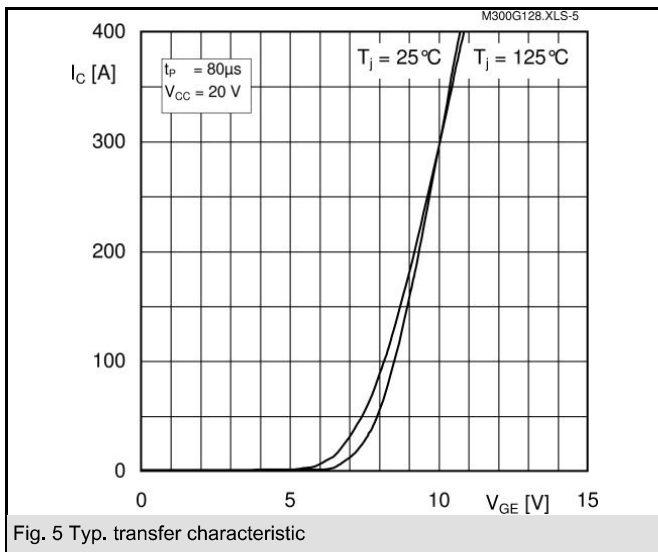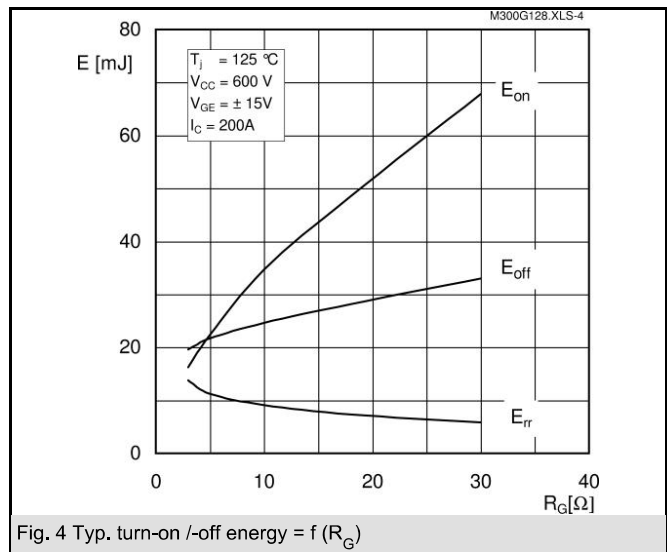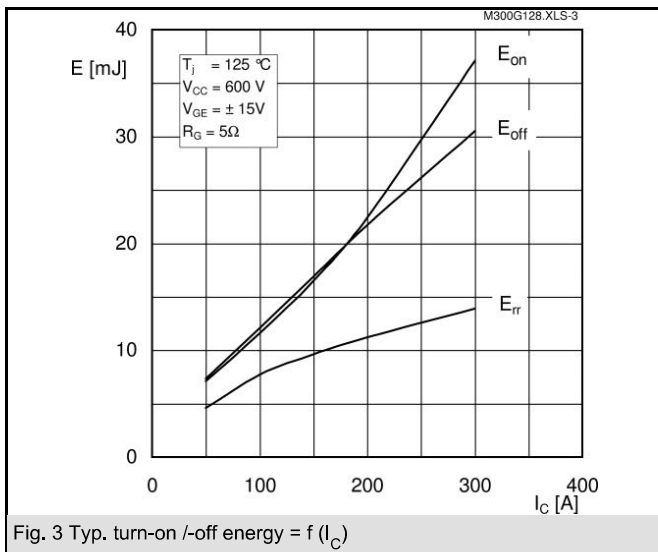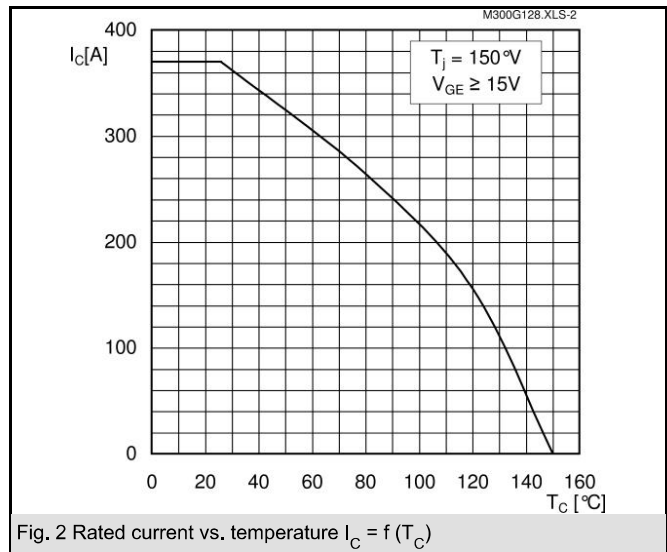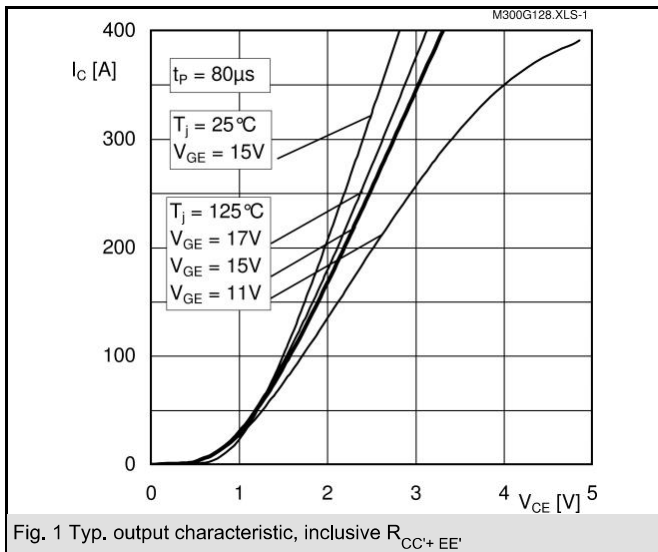

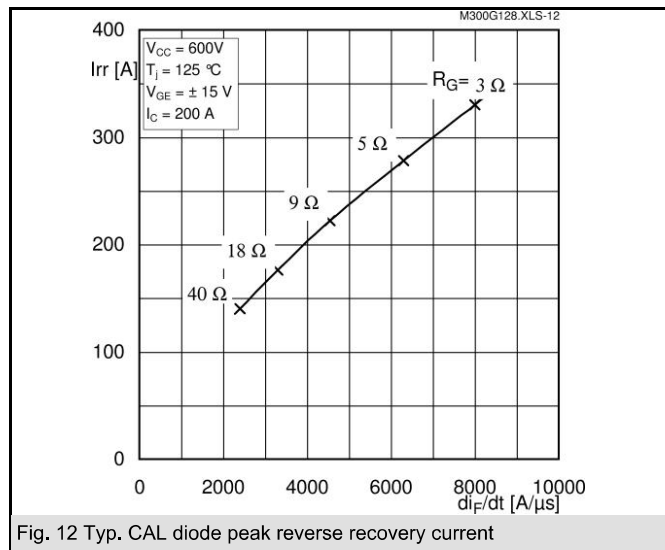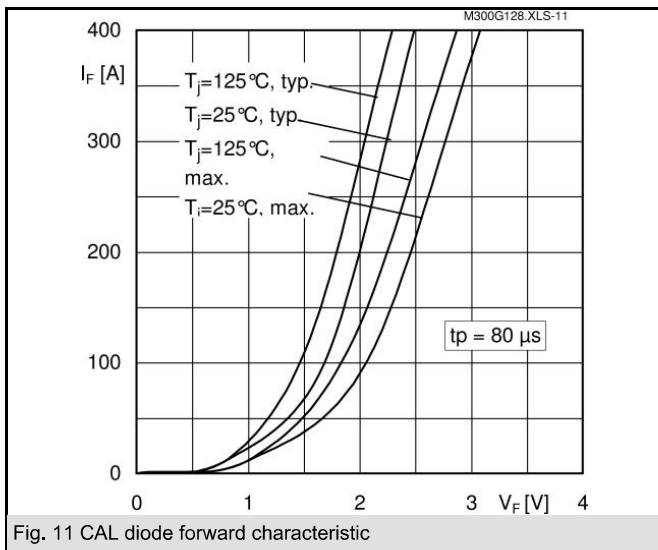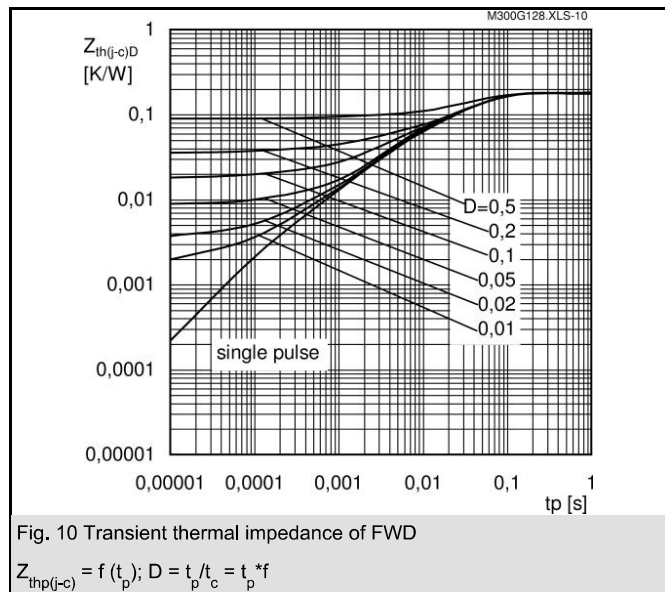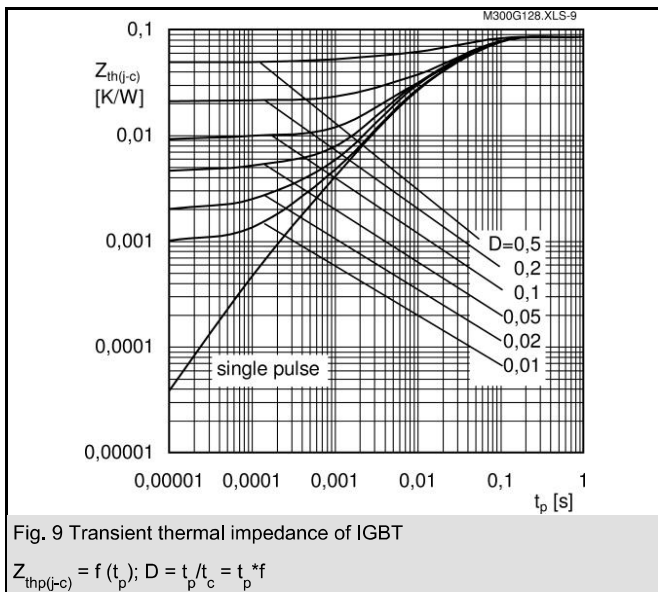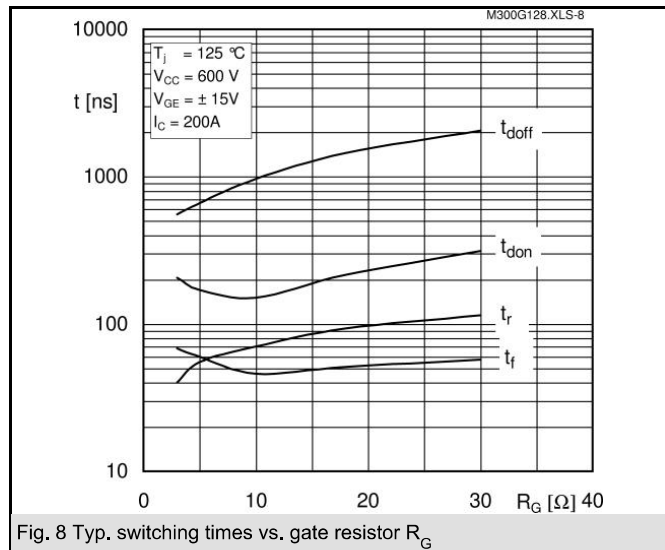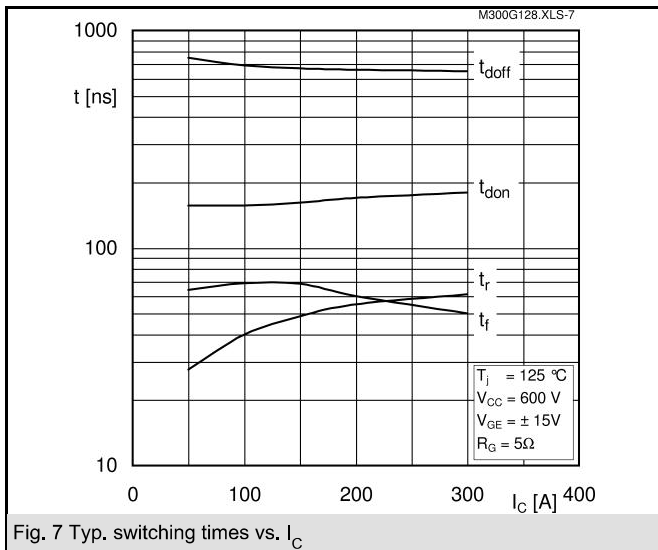

SKM 300GB128D

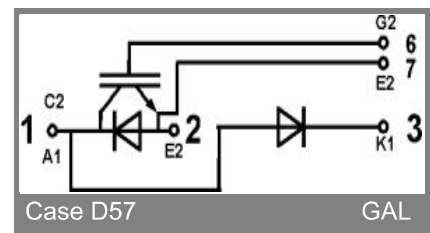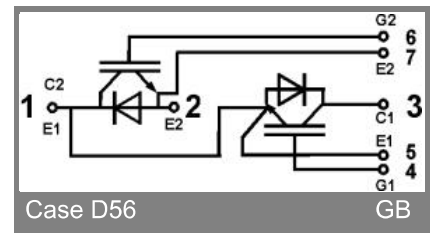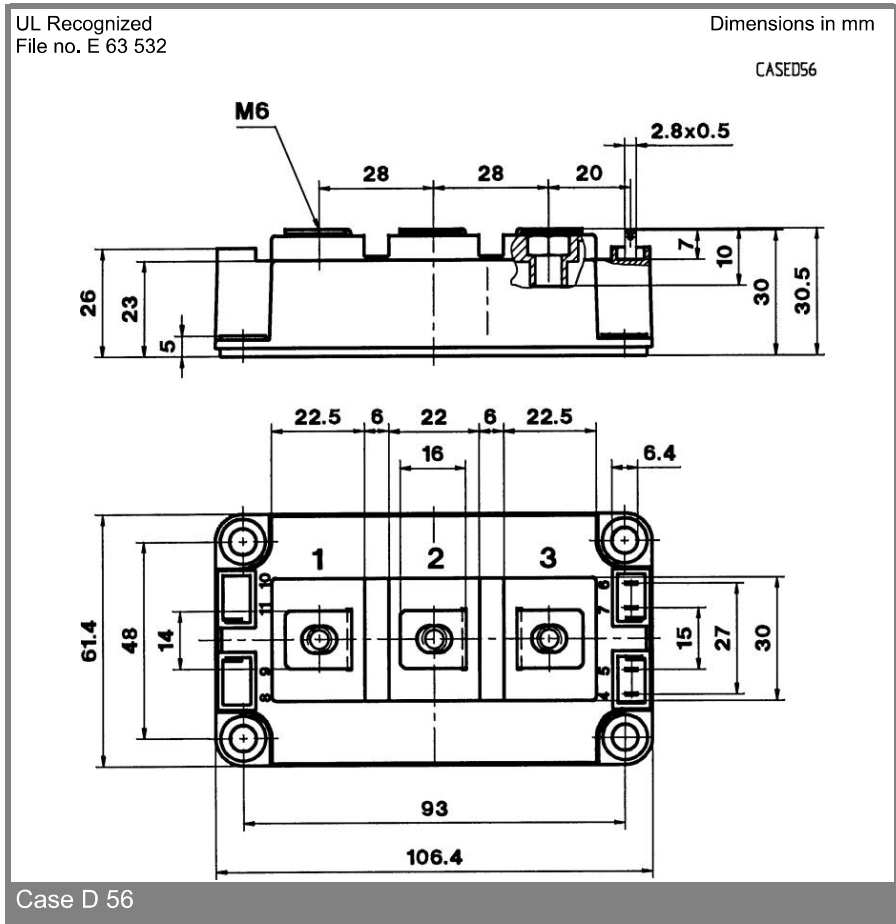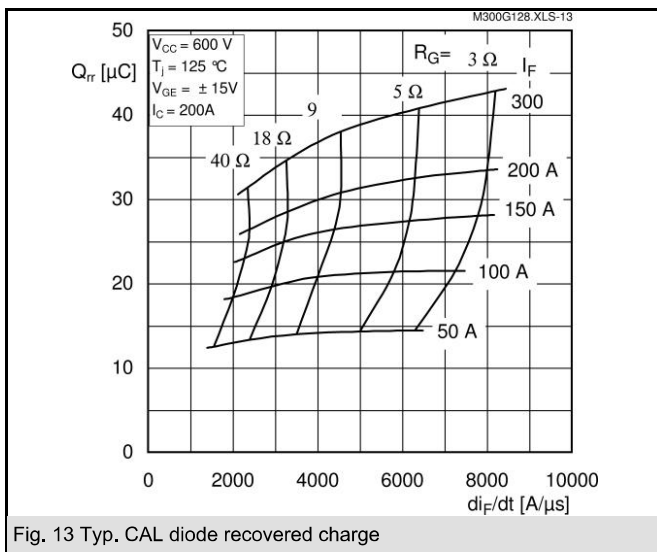

This is an electrostatic discharge sensitive device (ESDS), international standard IEC 60747-1, Chapter IX.

This technical information specifies semiconductor devices but promises no characteristics. No warranty or guarantee expressed or implied is made regarding delivery, performance or suitability.