

## IGBT MODULE ( N series )


### ■ Features

- Square RBSOA
- Low Saturation Voltage
- Less Total Power Dissipation
- Improved FWD Characteristic
- Minimized Internal Stray Inductance
- Overcurrent Limiting Function (4-5 Times Rated Current)

### ■ Applications

- High Power Switching
- A.C. Motor Controls
- D.C. Motor Controls
- Uninterruptible Power Supply

### ■ Outline Drawing

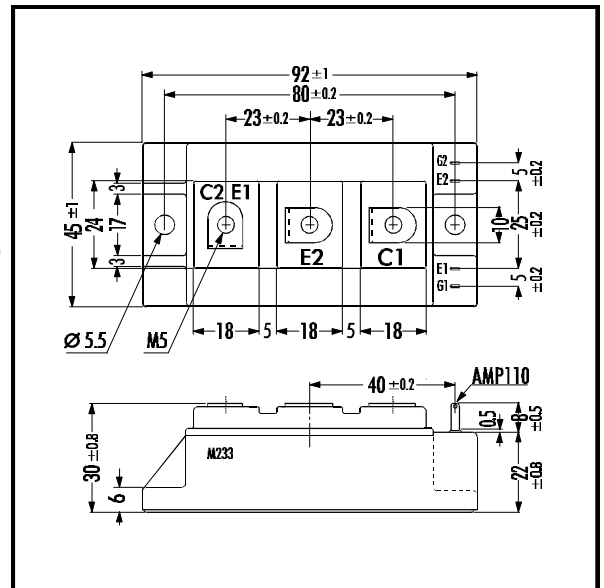

### ■ Maximum Ratings and Characteristics

#### • Absolute Maximum Ratings ( T<sub>c</sub>=25°C )

Items	Symbols	Ratings	Units
Collector-Emitter Voltage	V <sub>CEs</sub>	1200	V
Gate -Emitter Voltage	V <sub>GES</sub>	± 20	V
Collector Current	Continuous	I <sub>C</sub>	150
	1ms	I <sub>C PULSE</sub>	300
	Continuous	-I <sub>C</sub>	150
	1ms	-I <sub>C PULSE</sub>	300
Max. Power Dissipation	P <sub>C</sub>	1100	W
Operating Temperature	T <sub>i</sub>	+150	°C
Storage Temperature	T <sub>stg</sub>	-40 ~ +125	°C
Isolation Voltage	V <sub>is</sub>	2500	V
Screw Torque	Mounting *1	3.5	Nm
	Terminals *1	3.5	

Note: \*1:Recommendable Value; 2.5 - 3.5 Nm (M5)


#### • Electrical Characteristics ( at T<sub>j</sub>=25°C )

Items	Symbols	Test Conditions	Min.	Typ.	Max.	Units
Zero Gate Voltage Collector Current	I <sub>CEs</sub>	V <sub>GE</sub> =0V V <sub>CE</sub> =1200V			2.0	mA
Gate-Emitter Leakage Current	I <sub>GES</sub>	V <sub>CE</sub> =0V V <sub>GE</sub> =± 20V			30	μA
Gate-Emitter Threshold Voltage	V <sub>GE(th)</sub>	V <sub>GE</sub> =20V I <sub>C</sub> =150mA	4.5		7.5	V
Collector-Emitter Saturation Voltage	V <sub>CE(sat)</sub>	V <sub>GE</sub> =15V I <sub>C</sub> =150A			3.3	V
Input capacitance	C <sub>ies</sub>	V <sub>GE</sub> =0V V <sub>CE</sub> =10V f=1MHz		24000		pF
Output capacitance	C <sub>oes</sub>			8700		
Reverse Transfer capacitance	C <sub>res</sub>			7740		
Turn-on Time	t <sub>ON</sub>	V <sub>CC</sub> =600V I <sub>C</sub> =150A		0.65	1.2	μs
	t <sub>r</sub>			0.25	0.6	
Turn-off Time	t <sub>OFF</sub>	V <sub>GE</sub> =± 15V R <sub>G</sub> =5.6Ω		0.85	1.5	
	t <sub>f</sub>			0.35	0.5	
Diode Forward On-Voltage	V <sub>F</sub>	I <sub>F</sub> =150A V <sub>GE</sub> =0V			3.0	V
Reverse Recovery Time	t <sub>rr</sub>	I <sub>F</sub> =150A			350	ns


#### • Thermal Characteristics

Items	Symbols	Test Conditions	Min.	Typ.	Max.	Units
Thermal Resistance	R <sub>th(j-c)</sub>	IGBT			0.11	°C/W
	R <sub>th(j-e)</sub>	Diode			0.33	
	R <sub>th(c-f)</sub>	With Thermal Compound		0.025		


### ■ Equivalent Circuit

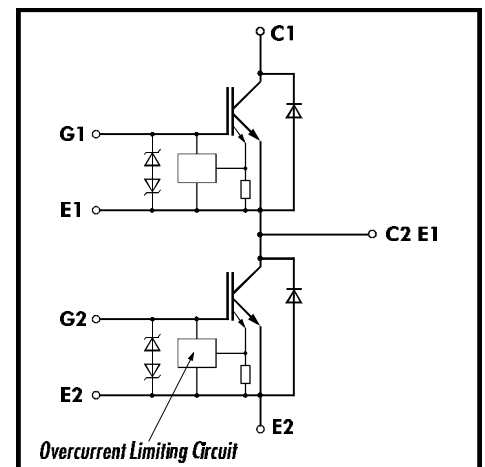


Collector current vs. Collector-Emitter voltage  
T<sub>j</sub>=25°C

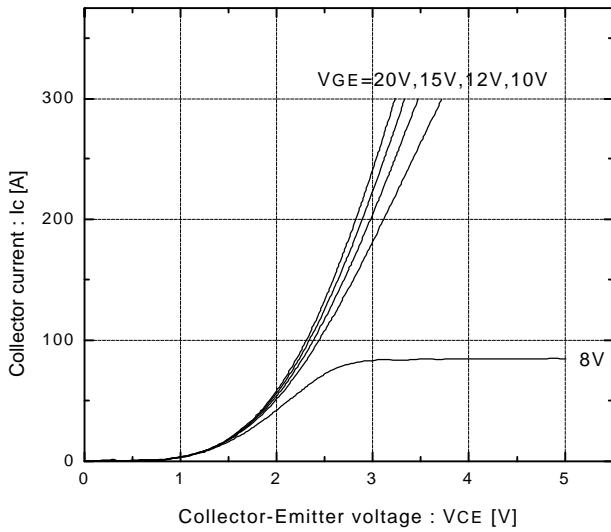


Collector current vs. Collector-Emitter voltage  
T<sub>j</sub>=125°C

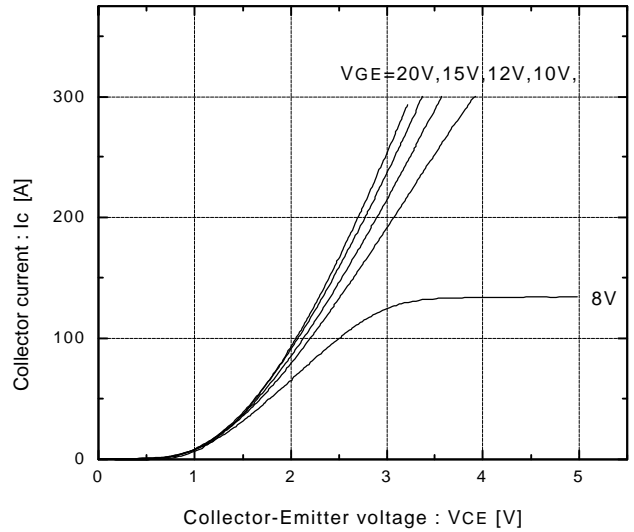


Collector-Emitter vs. Gate-Emitter voltage  
T<sub>j</sub>=25°C

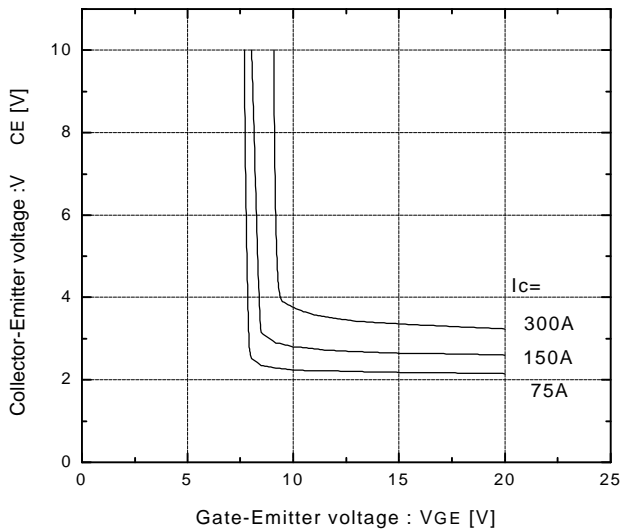


Collector-Emitter vs. Gate-Emitter voltage  
T<sub>j</sub>=125°C

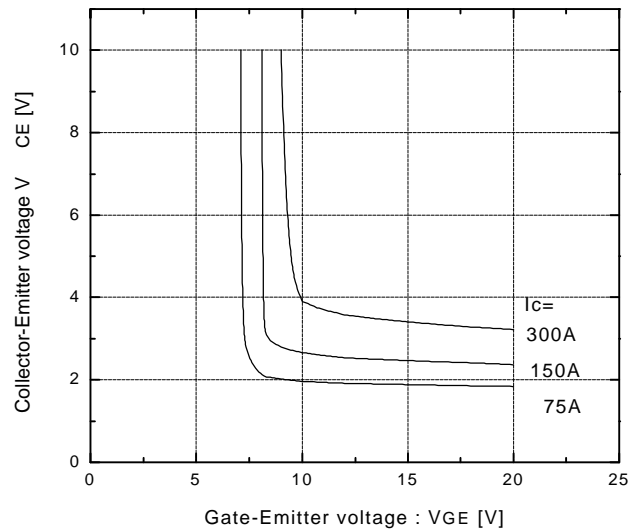


Switching time vs. Collector current  
V<sub>cc</sub>=600V, R<sub>G</sub>=5.6Ω, V<sub>GE</sub>=±15V, T<sub>j</sub>=25°C

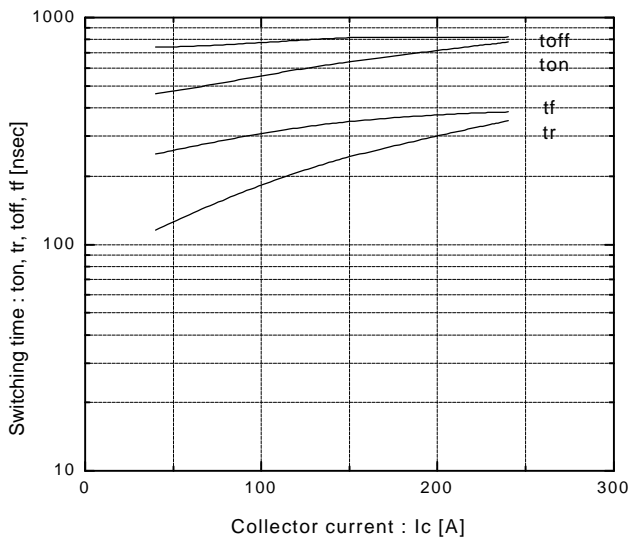


Switching time vs. Collector current  
V<sub>cc</sub>=600V, R<sub>G</sub>=5.6Ω, V<sub>GE</sub>=±15V, T<sub>j</sub>=125°C

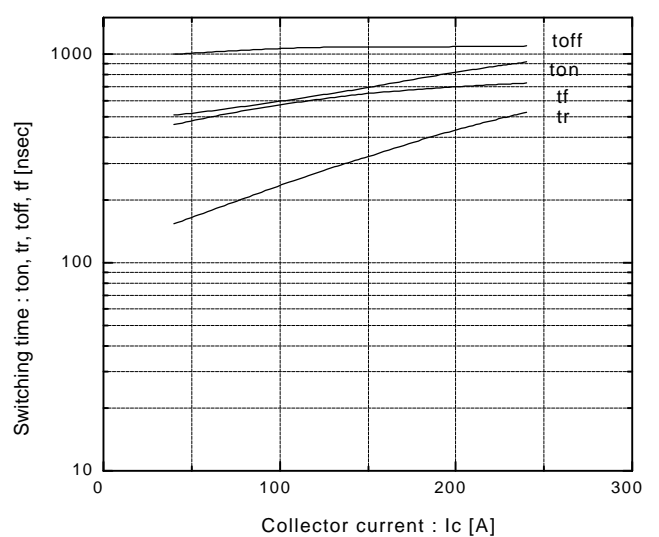


Switching time vs.  $R_G$   
 $V_{CC}=600V, I_C=150A, V_{GE}=\pm 15V, T_J=25^\circ C$

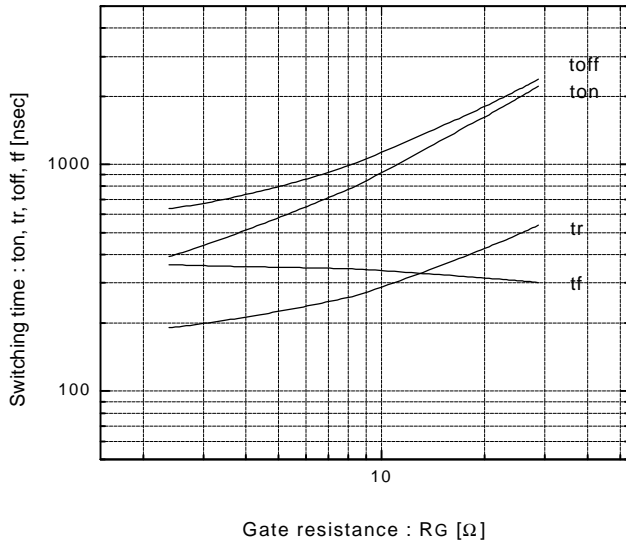


Dynamic input characteristics  
 $T_J=25^\circ C$

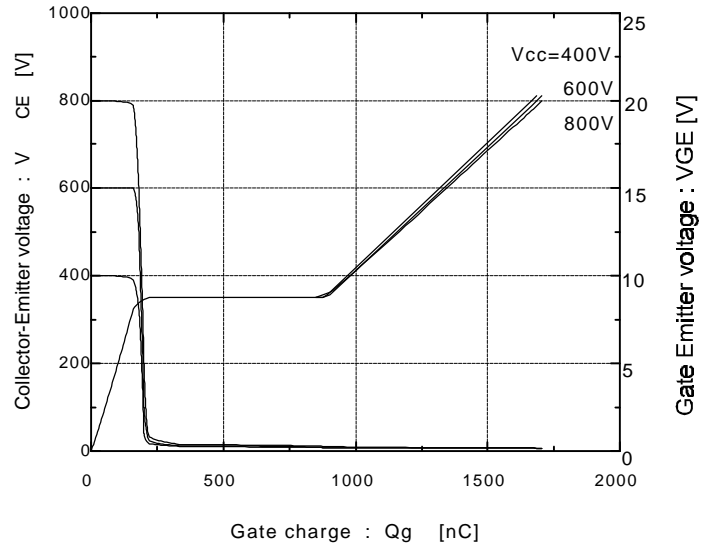


Forward current vs. Forward voltage  
 $V_{GE}=0V$

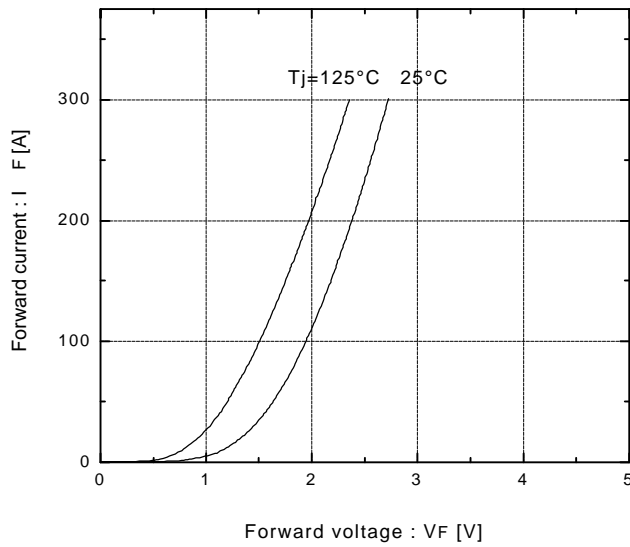


Reverse recovery characteristics  
 $t_{rr}, I_{rr}$  vs.  $I_F$

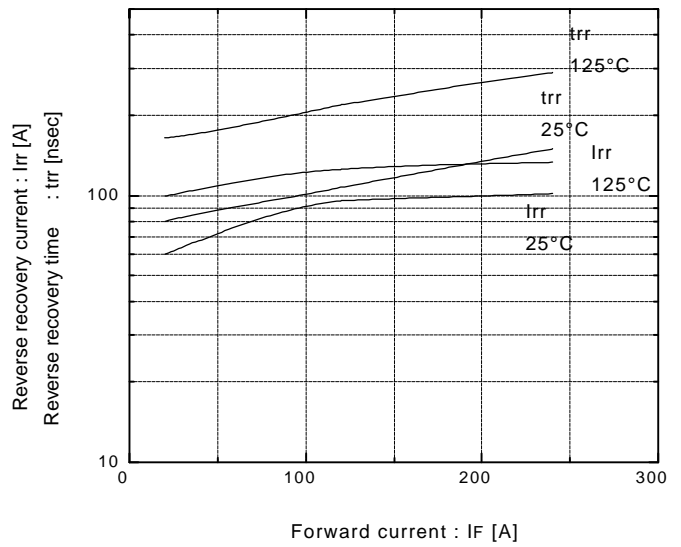


Transient thermal resistance

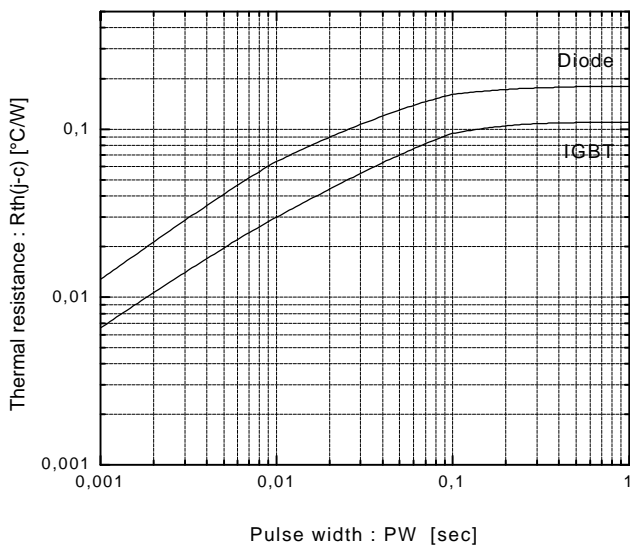


Reversed biased safe operating area  
 $+V_{GE}=15V, -V_{GE}\le 15V, T_J\le 125^\circ C, R_G\ge 5.6\Omega$

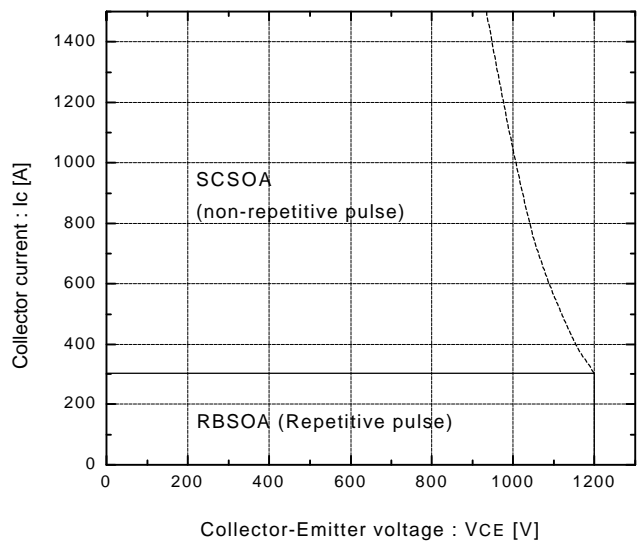

Switching loss vs. Collector current  
V<sub>cc</sub>=600V, R<sub>G</sub>=5.6Ω, V<sub>GE</sub>=±15V

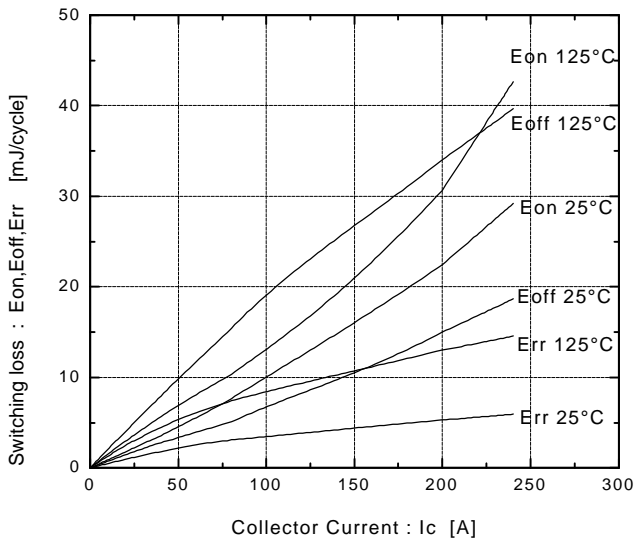

Capacitance vs. Collector-Emitter voltage  
T<sub>j</sub>=25°C

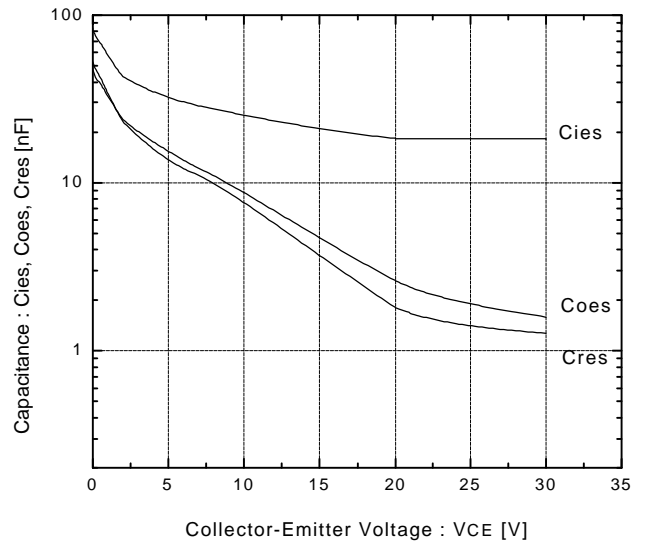

**Fuji Electric GmbH**

Lyoner Straße 26

D-60528 Frankfurt/M

Tel.: 069 - 66 90 29 - 0

Fax.: 069 - 66 90 29 - 56

**Fuji Electric (UK) Ltd.**

Commonwealth House  
2 Chalkhill Road Hammersmith

London W6 8DW, UK

Tel.: 0181 - 233 11 30

Fax.: 0181 - 233 11 60

This datasheet has been download from:

[www.datasheetcatalog.com](http://www.datasheetcatalog.com)

Datasheets for electronics components.